


VR9500

Advantages Ease of Use

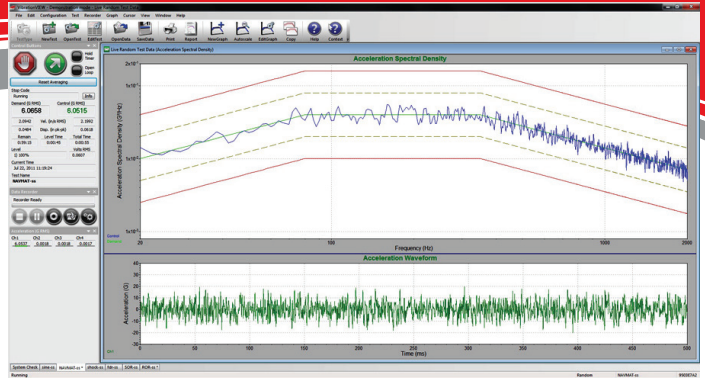

VibrationVIEW software is very intuitive. Many customers have set up their Vibration Research control system and configured a test within minutes of unpacking the box. Additionally, our customer support team is available to further assist you with questions regarding your Vibration Research products or to assist you in making the proper selection for your new control system purchase.


Features

PC & Windows Integration

The VR9500 integrates seamlessly with your PC and Windows operating system, enabling you to leverage your knowledge and accelerate your learning curve. Simply connect the VR9500, load the VibrationVIEW software and you are ready to test.


Drag & Drop

With drag and drop capabilities, the VR9500 allows you to quickly load any test into Microsoft Word or Microsoft Excel.

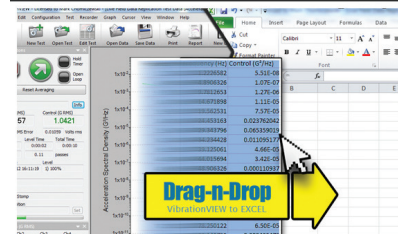

VR9500

Advantages Functionality

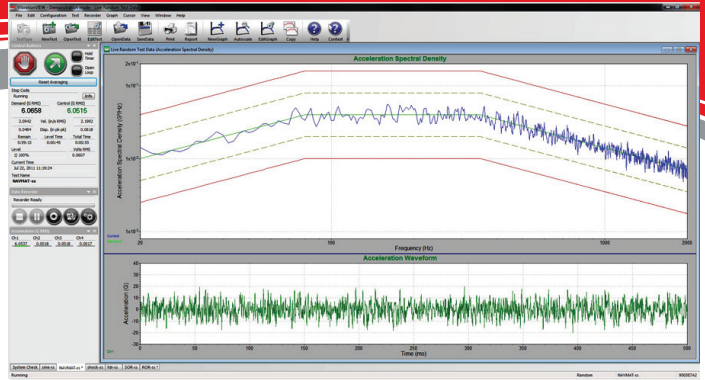

VibrationVIEW software is very intuitive. Many customers have set up their Vibration Research control system and configured a test within minutes of unpacking the box. Additionally, our customer support team is available to further assist you with questions regarding your Vibration Research products or to assist you in making the proper selection for your new control system purchase.

Features

Shaker Compatibility

VibrationVIEW works with any electro-dynamic, servo-hydraulic or servo-electric shaker and includes single axis, multi-axis, multi-loop and seismic control options.

Unparalleled Analysis

Our latest software release has even more analysis capabilities including cross spectrum, transfer functions, coherence and the ability to apply math functions to any graph trace.

Easy Integration

Applications such as Microsoft Excel, LabVIEW, Matlab and more can easily interface by way of Active-X functions.

Test and Level Scheduling

Tests can be scheduled to run a user-defined length of time and the spectrum level can be scaled by a specific dB level, either a percentage or scaled for a specified RMS acceleration. Tests can be programmed to run for various periods at different intensity levels and amplitude levels can be changed while the test is running.

Graphs

All packages share a common easy-to-use graphing system. Graphs can be auto-scaled or zoomed. Graph images and raw data can be copied to any word processing or spreadsheet.

Data Plots

Many graphical display options are available including acceleration spectral density, output voltage spectral density and channel-to-channel transmissibility. Cursors can be used to locate peaks and highlight particular data points.

Easy Test Entry

Frequency/amplitude breakpoints are in an easy-to-read table form. You can select to control constant or ramped acceleration, velocity or displacement. Automatically calculate and enter the frequency of intersection between any combination of constant acceleration, velocity or displacement lines. Up to 1,024 separate frequency/amplitude breakpoints can be entered.

System Check

All VibrationVIEW software packages include a system check mode that provides manually controllable sine wave output and oscilloscope and spectrum analysis plots of the accelerometer inputs. This test mode is used to calibrate the system and verify operation of the controller, amplifier, shaker and accelerometers.

Test Sequence

A test sequence provides the capability to automatically execute a sequence of tests. All of the tests may be the same type of application or you can switch modes as part of the test sequence.

Data Storage

All of the test data can be stored to the disk for later retrieval. Data storage can be done manually or programmed to automatically save at user-defined intervals.


Multi-Channel Extremal

Used to allow more than one input channel for control in a control strategy where the highest, lowest or average accelerometer reading will be used for control of the test. This option is included standard with both RandomVIEW and SineVIEW on controllers running VibrationVIEW version 6 software and higher.



VR9500

Advantages Functionality

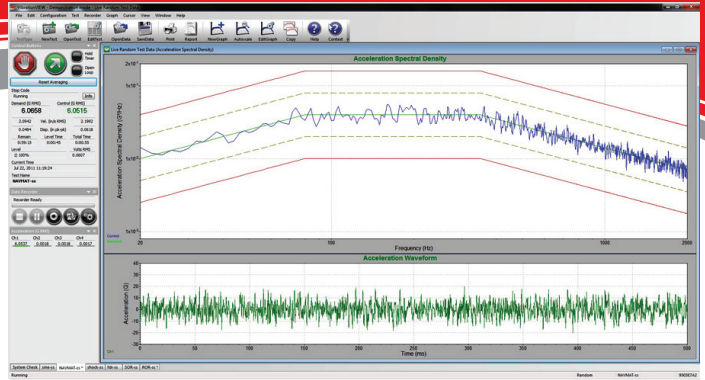

VibrationVIEW software is very intuitive. Many customers have set up their Vibration Research control system and configured a test within minutes of unpacking the box. Additionally, our customer support team is available to further assist you with questions regarding your Vibration Research products or to assist you in making the proper selection for your new control system purchase.

Features

Configurable Safety Limits

To protect your test article and shaker system, configurable acceleration limits, line limits and drive limits can be set by any user. The control input is also verified against shaker acceleration and displacement limits.

Equalization

The controller automatically equalizes the response of the shaker/fixture/product prior to running the test. The equalization can be memorized and stored with the test to quickly start a test at a full-equalized level.

Tracking Filters

Each input channel has the ability to enable/disable tracking filters. This allows you to remove harmonics and out-of-band noise from the measurements. The tracking filter bandwidth and signal averaging is user configurable.

Calibration Standard

Calibrate the VR9500 Revolution system in your own calibration laboratory using your own calibration instruments with the Automated Calibration Verification software and an Agilent/HP 34401A or 34410 digital multimeter.

Hardware Features


The VR9500 Revolution control system uses state-of-the-art hardware:

- < -100dB THD+N 24 bit dynamic range
- Control Sine, Random or Shock Vibration to 50,000 Hz
- Use an incredible 26,000 spectral lines - an industry maximum
- 24 bit dynamic range
- > 100dB random dynamic range
- > 130dB sine dynamic range
- > 140BFS spurious-free dynamic range



VR9500

Advantages Reliability

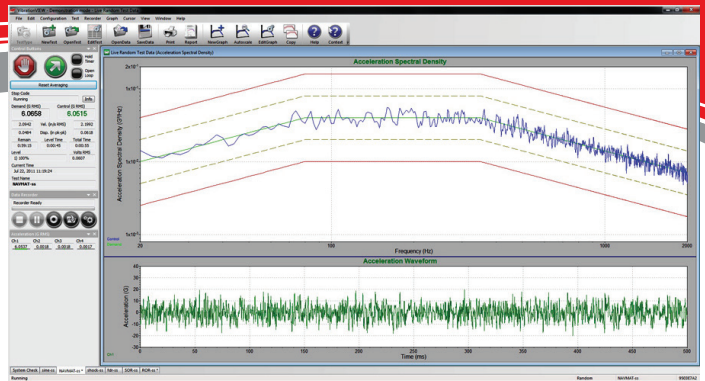

VibrationVIEW software is very intuitive. Many customers have set up their Vibration Research control system and configured a test within minutes of unpacking the box. Additionally, our customer support team is available to further assist you with questions regarding your Vibration Research products or to assist you in making the proper selection for your new control system purchase.

Features

Guaranteed Satisfaction and Reliability

Vibration Research controllers are specially designed and engineered for a high degree of reliability.

3 Year Warranty

All controllers have a three-year hardware warranty that protects your investment and your testing environment. Hardware warranty is extendable to 6 years with SMA through 6 years.

Factory Tested

Every controller is individually put through a rigorous test cycle and is calibrated to NIST standards prior to shipping.

Common Hardware Platform

Controllers utilize a common hardware platform, making troubleshooting a snap.

Built In Hardware Diagnostics

All VR9500 control systems have built-in hardware diagnostics. Redundant self calibration checks temperature, board voltages and calibration sensitivity every time the controller is turned on or connected to the software.


No Special Drivers

Vibration Research control systems do not require any special boards or drivers in your PC. Use any PC in your lab or connect to your laptop. Simply plug in the ethernet cable and begin testing.



VR9500

Advantages Scalability

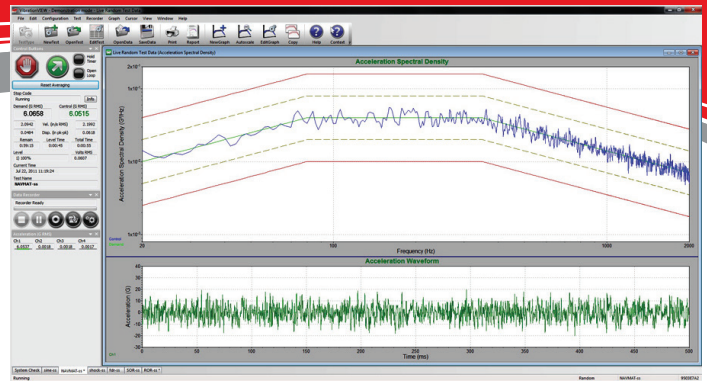

VibrationVIEW software is very intuitive. Many customers have set up their Vibration Research control system and configured a test within minutes of unpacking the box. Additionally, our customer support team is available to further assist you with questions regarding your Vibration Research products or to assist you in making the proper selection for your new control system purchase.

VR9500 Hardware Choose the right path.



Features

128 Available Inputs

The VR9500 is scalable from 1 to 128 channels. The modular design uses four channel blocks that can be easily rack mounted or stacked on a desk.

Economic Solution

Each four-channel module can be used independently on separate shakers or linked into a single stack for those jobs that require a higher channel count. This economic solution can mean a substantial cost savings. Additional outputs and software may be required to control more than one shaker.

Web and Email Options

The web and email options allows for remote test initiation, monitoring and shut down from anywhere in the world.

Training

Training is available on-site or in our facility. We also offer training via web seminars and on our website. Whether you want to learn the basics or find out how to take advantage of the many features available in the Vibration Research control system, we can help.

